


Outdoor Interactive 4K
32inch - 98inch



| Panel size | 32inch | 43inch | 49inch | 55inch | 65inch | 75inch | 86inch | 98inch |
|-------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Resolution | 3840 x 2160 |
| Interactivity | 20 point touch |
| Panel Grade | A+ |
| Brightness (nit) | 3000nit |
| Contrast Ratio | 5000:1 | 5000:1 | 5000:1 | 5000:1 | 5000:1 | 5000:1 | 5000:1 | 5000:1 |
| Viewing Angle | 178°(H)/178°(V) |
| Lifetime (hrs) | 30,000 | 30,000 | 30,000 | 30,000 | 30,000 | 30,000 | 30,000 | 30,000 |
| Response time | 8ms |
| Processor | Android 14 8+128GB |
| Display | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass | 4+4mm laminated glass, IK 10 grade, Anti-reflective glass |
| Features | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board | Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board |
| IP Rating | IP67/68 |
| Power Supply | Switch mode 110 - 240V UL certificated |
| Voltage | Rated AC 100-240V Max 90-264V 50/60Hz |
| Maximum power consumption (W) | 280W |
| Standby power consumption (W) | 0.5W |
| Working temperature | -20°C~70°C |
| Storage temperature | -20°C~60°C |
| Working humidity | 10%~90% | 10%~90% | 10%~90% | 10%~90% | 10%~90% | 10%~90% | 10%~90% | 10%~90% |
| Ports | USB, RJ45, RS232 |
| Case | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional | Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional |
| Case | Free standing |
| Remote Control | Included |
| Wifi Antena | Included |
| IEC Cable | Included |
| Gross Weight (kg) | 40kg | 50kg | 60kg | 70kg | 80kg | 95kg | 110kg | 200kg |

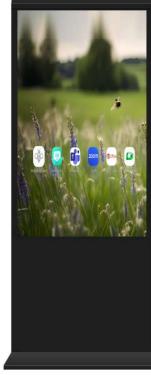