


## Appearance

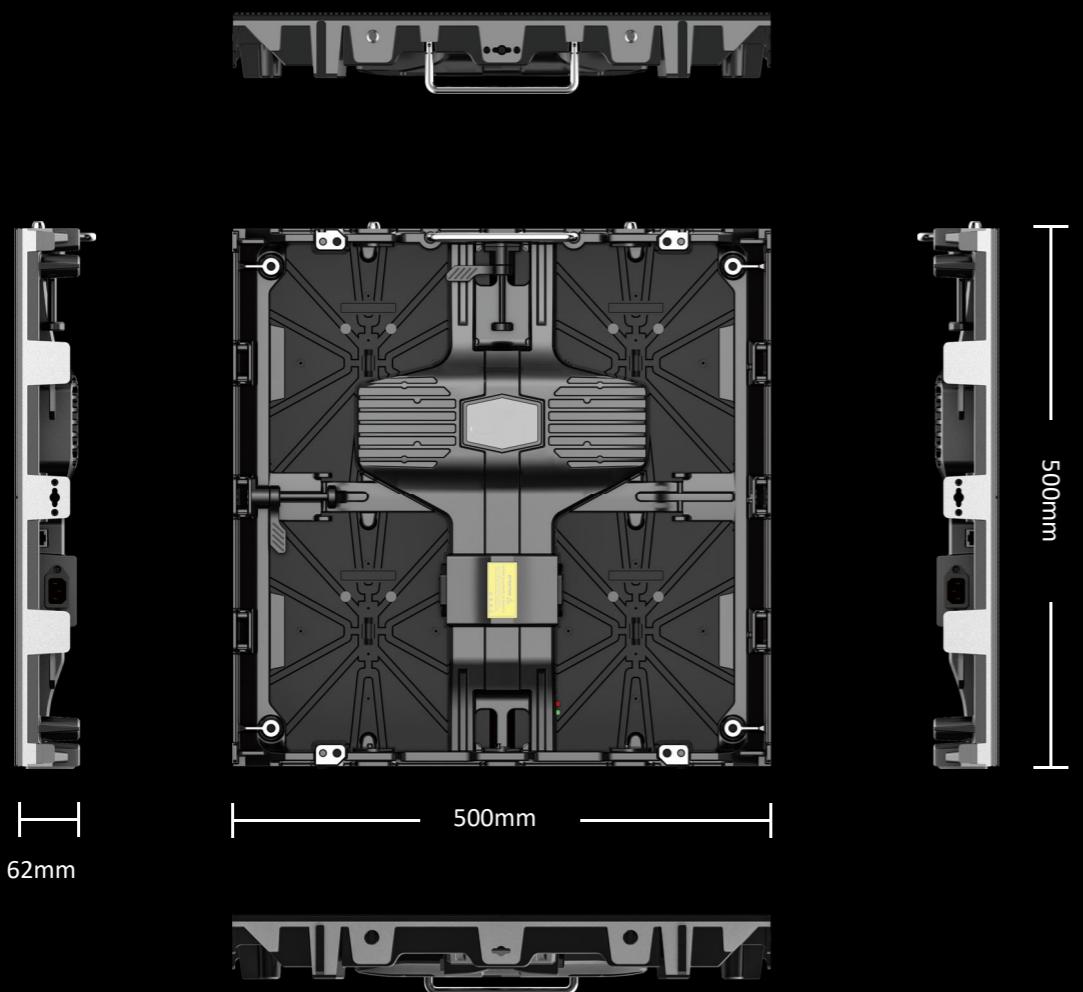


## Product Specifications

Pixel Pitch (mm)	1.953	2.604	2.97	3.91
Cabinet size (WxHxD/mm)	500 x 500 x 62			
Cabinet Resolution	256 x 256	192 x 192	168x168	128 x 128
Cabinet Weight (Kg)	5.8	5.8	5.8	5.8
Brightness (Nits)	800	800	800	800
Refresh Rate (Hz)	≥2800	≥2800	≥3840	≥3840
Gray Scale (Bit)	14	14	14	14
IP Rating (Front/Rear)	IP65	IP65	IP65	IP65
Max./Avg Power Consumption(W/m <sup>2</sup> )	520/147	520/147	520/147	520/147
Curve	0 ~ 90°	0 ~ 90°	0 ~ 90°	0 ~ 90°


## Extremely light weight and thin thickness

Thickness less than 62mm, weight in 6kg, ahead of other suppliers.

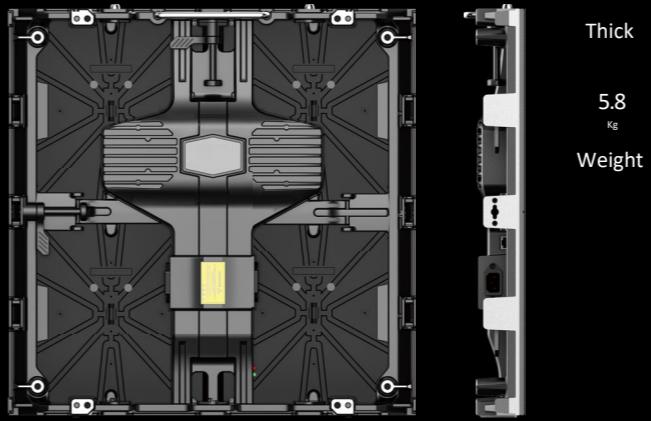


## Front Maintenance

Modules and power receiving cards can be removed from the front.

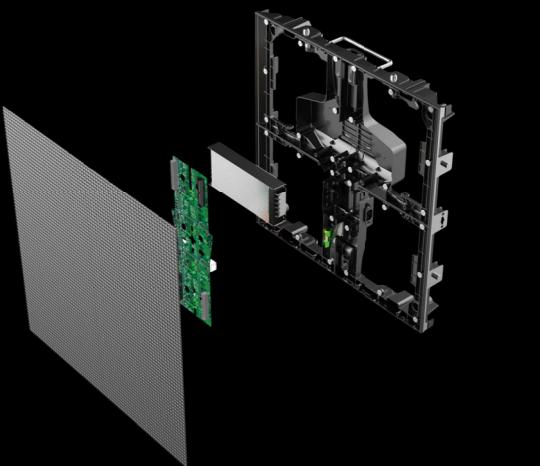


## Multi-purpose with 1set screen

Support fixed use, but also compatible with rental use.

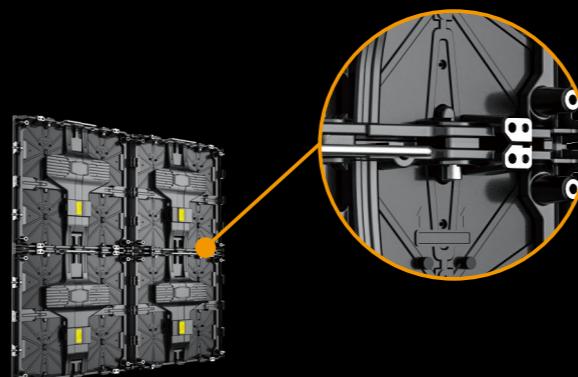

## 90° Rectangular Splicing

Supports 0 ~ 90 ° custom angles , can be made at 90° angle splicing.

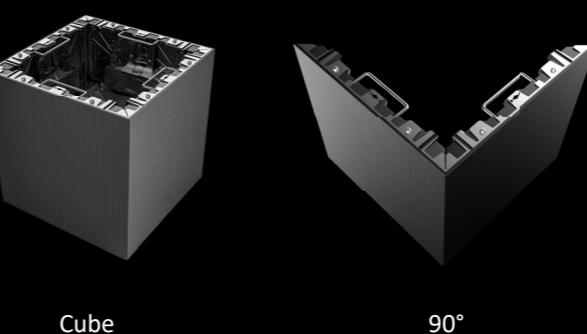

## Ultra-thin installation

Using mounting bracket can be wall mounting.

